



Model No.: **DLa-30W** **DLa-38W**




MAIN FEATURES:

- Perfectly suitable to replace traditional 6 inch down light.
- Available in CRI 80+ or 90+.
- Dimming methods: Triac, DALI, 0-10V.
- Unique designed reflector, perfect lighting distribution without any shadow.
- Fin-style 6063 aluminum heat sink for high efficient heat dissipation.
- All-round beam direction adjustable.


LIGHT	CREE COB LED
INPUT VOLTAGE	100-240V / 100-120V / 220-240V AC, 50-60Hz
DRIVER	CE, SAA, UL approved
DIMMABLE	Triac, DALI, 0-10V
HOUSING COLOR	White+black
OPERATING TEMPERATURE RANGE	-20~+45°C

MODEL NUMBER	POWER	LED CURRENT	COLOR TEMPERATURE	LUMINOUS FLUX (lm)	Beam angle (°)	COLOR RENDERING INDEX_CRI
DLa-30W	30W	700mA	● 2,700K	2190 ± 5%	24°, 60°	80+ 90+
			● 3,000K	2460 ± 5%		
			○ 4,000K	2610 ± 5%		
			○ 5,000K	2645 ± 5%		
DLa-38W	38W	900mA	● 2,700K	2736 ± 5%	24°, 60°	80+ 90+
			● 3,000K	3070 ± 5%		
			○ 4,000K	3268 ± 5%		
			○ 5,000K	3344 ± 5%		

All-round beam direction adjustable High efficient heat dissipation design

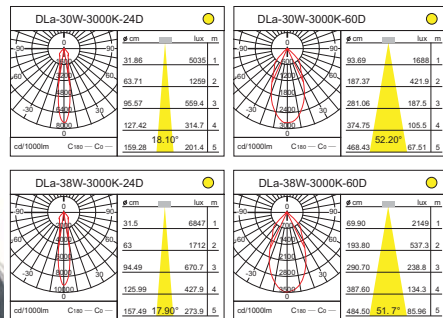


DLa-30W



Hole size Ø165-180mm

DLa-38W



Hole size Ø165-180mm