



Model No.: DLe-8W




MAIN FEATURES:


- Perfectly suitable for hotel and Villa lighting.
- Anti-glare lens, perfect lighting distribution without any shadow.
- Dimming method: Triac.
- Good CRI, very close to traditional halogen light.
- Different fixtures & cut-outs(60mm-100mm) selectable.
- Beam direction adjustable with tiltable lamp structure.

LIGHT	Bridgelux COB LED
INPUT VOLTAGE	100-240V / 100-120V / 220-240V AC, 50-60Hz
DRIVER	CE, SAA approved
HOUSING COLOR	White, silver
OPERATING TEMPERATURE RANGE	-20--+45°C


MODEL NUMBER	POWER	LED CURRENT	COLOR TEMPERATURE	LUMINOUS FLUX (lm)	Beam angle (°)	COLOR RENDERING INDEX_CRI
DLe-8W	8W	100mA	<ul style="list-style-type: none"> ● 2,700K ● 3,000K ○ 4,000K ○ 5,000K 	<ul style="list-style-type: none"> 443 ± 5% 481 ± 5% 551 ± 5% 606 ± 5% 	25°, 38°, 60°	80+

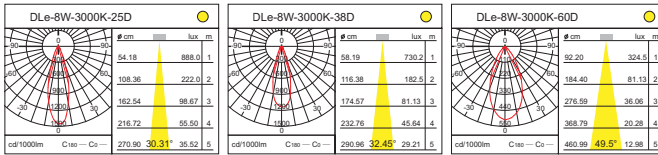


DLe-8W-R80



DLe-8W-R90




DLe-8W-R110




2 types of anti-glare lens medium and wide High efficient heat dissipation design




DLe-8W-S80




DLe-8W-S90




DLe-8W-S110




DLe-8W-R70




DLe-8W-R70-1




DLe-8W-R80-2




DLe-8W-R88-2




DLe-8W-R82-3



DLe-8W-R88-3



DLe-8W-R70-4



DLe-8W-R90-4

