



**Model No.:** IL515-200W IL515-180W





**MAIN FEATURES:**

- Perfectly suitable to replace 400W metal halide lamp.
- With original Meanwell driver to ensure absolutely reliable working performance.
- High luminous efficiency: >100lm/W.
- Superior Aluminum with high thermal conductivity for efficient heat dissipation.
- IP 65.

LIGHT	Bridgelux COB LED
INPUT VOLTAGE	100-277V AC, 50-60Hz
POWER FACTOR	>0.95
LIGHT EFFICIENCY	>90%
RECOMMEND INSTALLATION HEIGHT	10-12M
INSTALLATION	Suspending
HOUSING COLOR	Silver, black
OPERATING TEMPERATURE RANGE	-30~+50°C

MODEL NUMBER	POWER	LED CURRENT	INITIAL LUMINOUS FLUX(lm)	BEAM ANGLE (°)	IP RATE	COLOR RENDERING INDEX_CRI
IL515-200W	200W	4.20A	22,000±5%	45°,90°,120°	IP 65	70+
IL515-180W	180W	3.75A	19,800±5%	45°,90°,120°	IP 65	70+

**DRAWING**

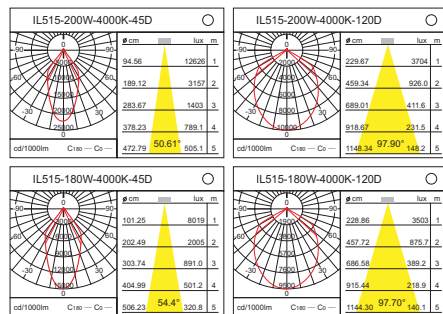

**Model No.:** IL515-150W IL515-120W



**MAIN FEATURES:**

- Perfectly suitable to replace 300W metal halide lamp.
- With original Meanwell driver to ensure absolutely reliable working performance.
- High luminous efficiency: >100lm/W.
- Superior Aluminum with high thermal conductivity for efficient heat dissipation.
- IP 65.

LIGHT	Bridgelux COB LED
INPUT VOLTAGE	100-277V AC, 50-60Hz
POWER FACTOR	>0.95
LIGHT EFFICIENCY	>90%
RECOMMEND INSTALLATION HEIGHT	8-10M
INSTALLATION	Suspending
HOUSING COLOR	Silver, black
OPERATING TEMPERATURE RANGE	-30~+50°C

MODEL NUMBER	POWER	LED CURRENT	INITIAL LUMINOUS FLUX(lm)	BEAM ANGLE (°)	IP RATE	COLOR RENDERING INDEX_CRI
IL515-150W	150W	4.76A	16,500±5%	45°,90°,120°	IP 65	70+
IL515-120W	120W	3.80A	13,200±5%	45°,90°,120°	IP 65	70+

**DRAWING**

